

LED Obstruction light Single Assembly


Made in THAILAND

Model : 48W5AL



Compliance with following
Specification AC # 1505345-43E
ICAO (ANNEX 14, THIRD EDITION-
JULY 1999 Chapter 6)

Obstruction light is the first certified
LED based Low-Intensity ,Type A
obstruction light. This fixture
Is used to mark any obstacle that may
present hazards to aircraft navigation

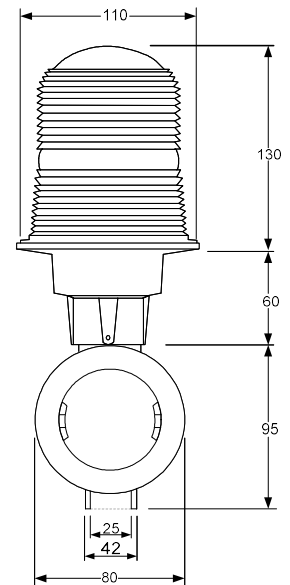

Features

- LED Red lamp , Chip technology –AlInGap / Gap and Standard 5 mm (T-1 3/4") Water clear package
- More than 70,000 Hours life average at normal usage.
- Operates on direct current at 43-57 Vdc
- Low power consumption 5 W (±1 W) at DC 48 V.
- Can be adjusted to be flash (30 time/minute) or steady burning
- Transient protection circuit at 4.5KA, wave form 8/20us (MOV)
- Properties structure to be Earth grounding provisions provided
- Unique optically designed lens to enhance LED operation and provide 360°visibility at 15 cd typical
- Lens, Clear Fresnel glass globes for 360 visibility
- Body Cat. No.BS-WF-001 , IP 65 Cast aluminum housing with yellow finish
- Weather/corrosion resistant lamp assembly
- Self-contained winding compartment eliminates additional boxes
- Single fixture , Threaded 3/4" bottom hub for mounting



Weight:

SINGLE OB.LIGHT 4.5 lbs, 2.0 kg